



## Magnetel® Liquid-Level Gauges

### Application

The 6300 Series Magnetel® liquid-level gauges are designed to accurately determine the percentage of total tank volume for most liquids in stationary-storage applications. UL listed for LP Gas and NH<sub>3</sub> service.

### General Information & Features\*

These Magnetel® Gauges are available in four basic models:

- Model 6336** — Incorporates 4" [100 mm] dial and is designed for top mounting.
- Model 6360** — Incorporates 8" [200 mm] dial and is designed for top mounting.
- Model 6339** — Incorporates 4" [100 mm] dial and is designed for side, end or angle mounting.
- Model 6342** — Incorporates an 8" [200 mm] dial and is designed for side, end or angle mounting.


The large, easy-to-read dials are also easy to remove and replace. Materials of construction vary depending on the types of liquids to be gauged. Many different optional features are available to meet your specific needs. These materials and options, along with their pricing impact, are summarized for each model in price list 6300.

Magnetel® gauges are designed for working pressures ranging from atmospheric to 450 [31 Bar] psig.

For instructions on how to install the Magnetel® gauge, see #115-820 *Magnetel® Liquid-Level Gauge Installation Instructions*.

Prefix Number	Application
None	Industrial
A	anhydrous ammonia (NH <sub>3</sub> )
C	LP-gas and NH <sub>3</sub>
P	LP-gas
D	double head (liquified CO <sub>2</sub> )
M	mobile service
V	vertical tanks
X	straddle mounting (bolt holes straddle vertical centerline)
Y	fits through 2" schedule 80 coupling

Suffix Number	Gauge Materials (wetted parts)
-11	plated steel and stainless steel
-12	300 series stainless steel, critical parts - type 316 or better



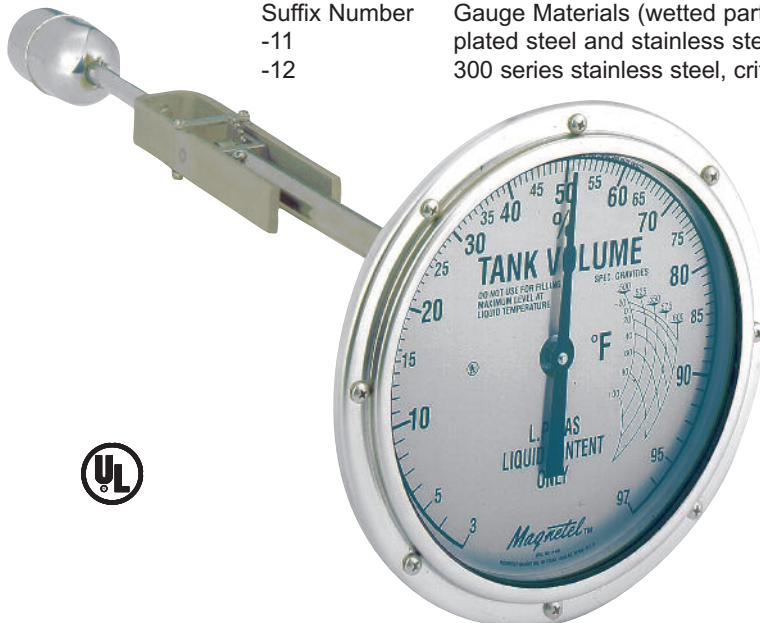


DMC Gas Equipment Limited  
 (+852) 2851 2121  
 dmcsaleshk@dmc-gas.com.hk  
 www.dmc-gas.com.hk

\* Materials and specifications are subject to change without notice.  
 Pressure ratings subject to change due to temperature and other environmental considerations.

See reverse side for dimensional data, materials of construction, performance, and advice on how to order.

*The Measure of Excellence*

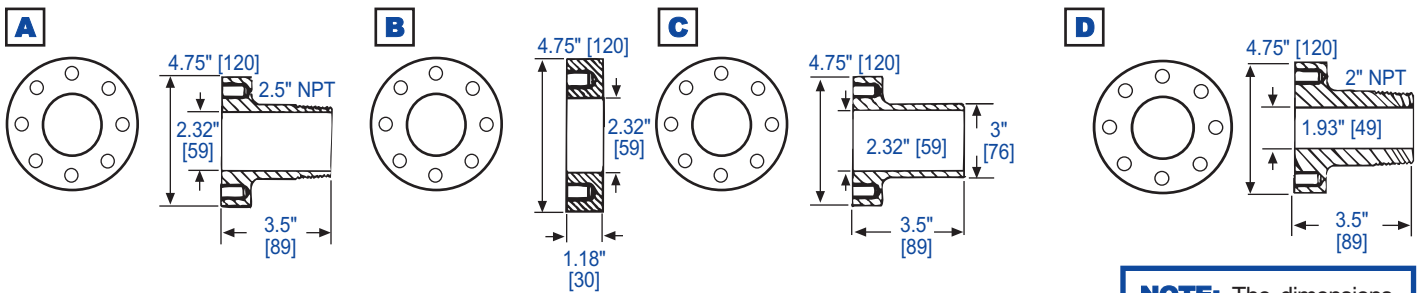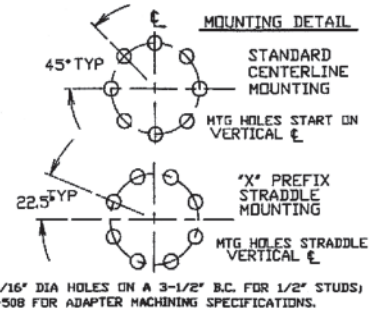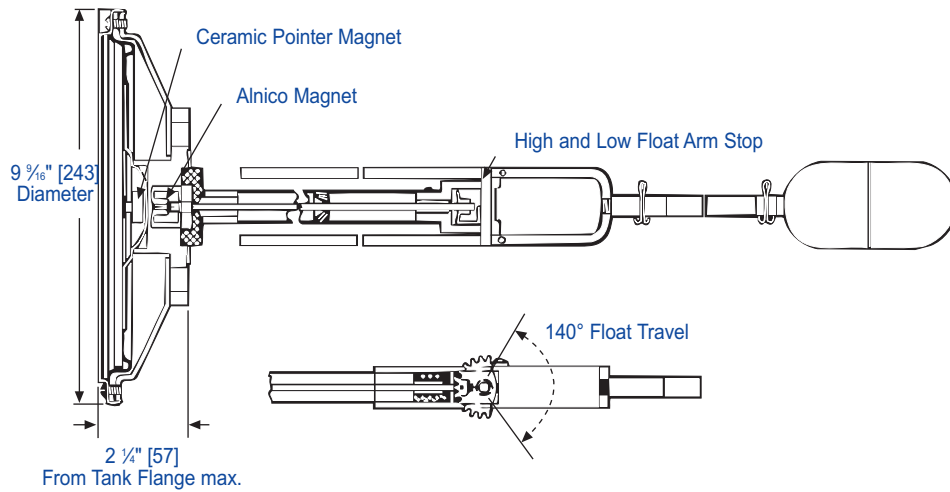

**3.5\"/>**

Rochester Machining Standard MS-508 - See Rochester 22 Series

**NOTE:** The dimensions of the threaded neck on this adapter are equivalent to Schedule 80 pipe.

Part #	Mates With	Type	Material	Thread	Dimensions
0022-00029	6300 Series	2 1/2\"/>			



DMC Gas Equipment Limited  
 (+852) 2851 2121  
 dmcsaleshk@dmc-gas.com.hk  
 www.dmc-gas.com.hk

**When Ordering, Specify:**

1. Liquid to be gauged and specific gravity.
2. Inside diameter of tank, head style: ellipsoidal, semi-ellipsoidal or hemispherical.
3. Complete model number desired from price list 6300, (example M6342-11).
4. Prefix letters for available options from price list 6300.
5. If a dial other than standard is required, furnish drawing and/or details.
6. Furnish tank drawings whenever ordering gauges for angle-mounting or for installation in vertical tanks.
7. Tank mounting flange, if required (see chart above).

**CAUTION:** For LP Gas or NH<sub>3</sub> applications requiring 2\"/>

**NOTE:** Y6300 Series gauges will fit through 2\"/>

**Note:** For installation instructions see 115-820  
 For machining standards see MS-508  
 'Y' supplemental installation instructions see DS-1062  
 For adapters see 22 Series - Magnetel® forged steel